






Hints from the Model Garage

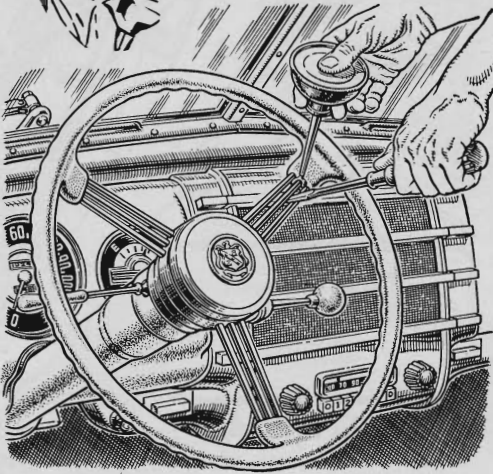


Oil Quiets Wheel Squeaks. A few drops of brake fluid or rubber lubricant will stop squeaks in a banjo-type steering wheel. Insert a screwdriver as shown and pry gently to allow the lubricant to enter where the spokes join the rim.

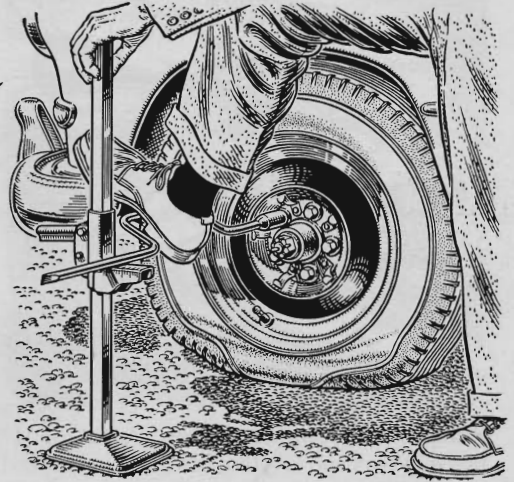

Weight Loosens Rusted Bolts. If a wheel nut or bolt refuses to budge, adjust your jack to the same height as the nut, set the lug wrench on the nut horizontally, prop it on the jack, and apply your weight to the handle. Pressure, not kicking, does it.

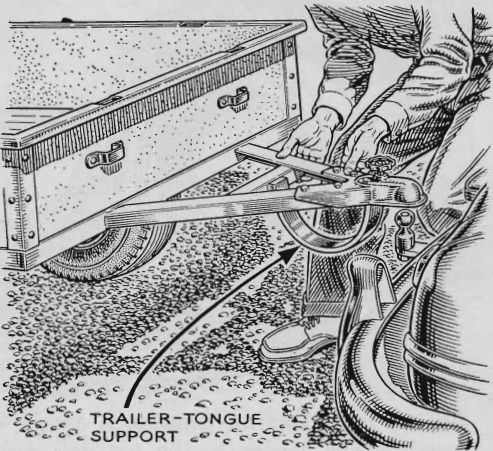

Guard Supports Trailer Hitch. A small trailer frequently doesn't have a support to keep the hitch socket free from mud and dirt when the trailer is parked. A piece of band iron bent in a half circle and welded or bolted to the tongue will give the protection needed. The loop should extend about 6" below the tongue.

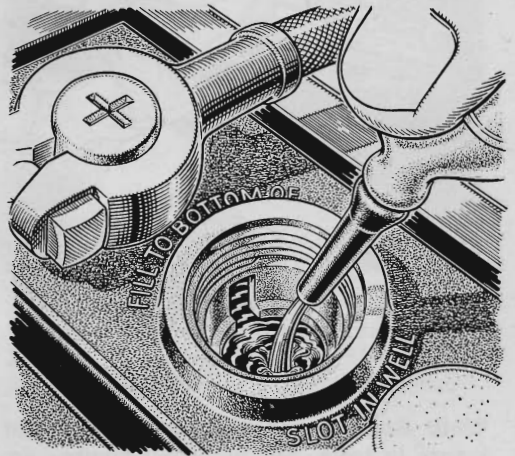

Slot Guides Battery-Water Level. In the past you were usually supposed to keep battery electrolyte just above the plates. But instructions are more specific for the latest batteries in GM cars. In these, you should add water to raise the level to a ledge at the bottom of a slot in the filler well. Don't fill above this.