



Hints from the Model Garage




After wax has been applied to a car and is ready to be rubbed down, you'll get a rave job if you dip the wiping cloth lightly in a pan of flour. The surface will brighten up with far less work with the polishing cloth.

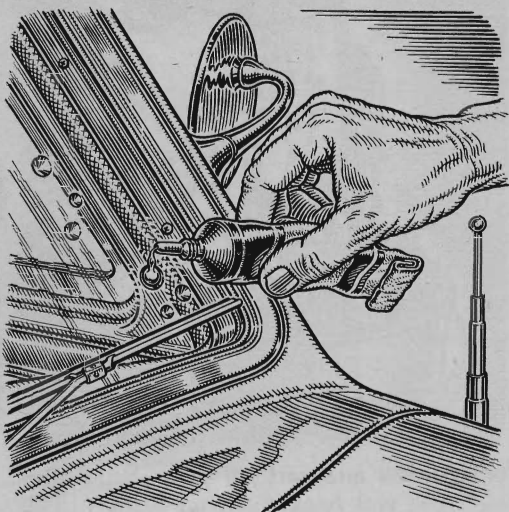

Holes in windshields caused by stones or BBs are often conical ones with the small end on the outer side. To keep moisture from discoloring the safety glass, wash the hole with household ammonia, let it dry and apply transparent cement to both sides.

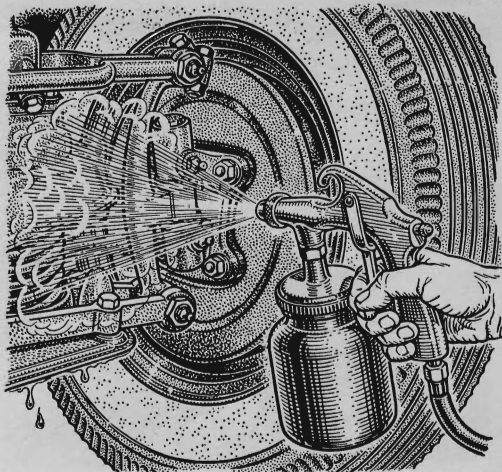

Grease can be cleaned off such parts as the front suspension, transmission or differential by using a paint sprayer to spray on kerosene. Allow the kerosene to soak in for a few minutes and then turn a water hose on the area full force.

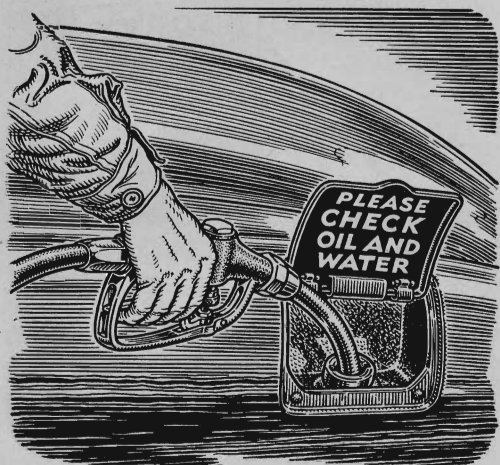

When his car began to burn oil, one owner lettered this legend on the underside of the filler-cap door. His car is driven by several persons, and the sign lessens the chance that someone will neglect to have the oil checked at each gas stop.

Please turn the page for more auto hints.