






Hints from the Model Garage

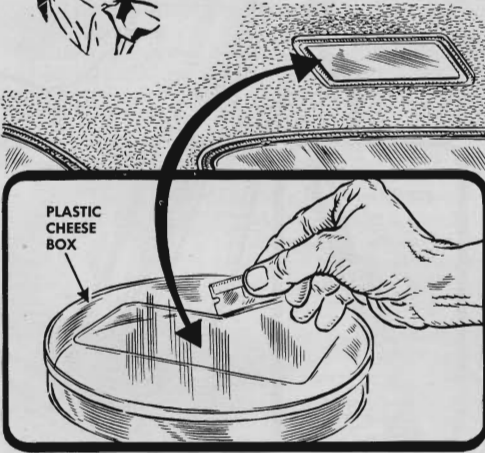


A broken dome-light glass can be replaced easily and inexpensively by cutting the desired size from one of the plastic containers in which cheese and other products are sold. Give the disk a frosted appearance by sanding it lightly.

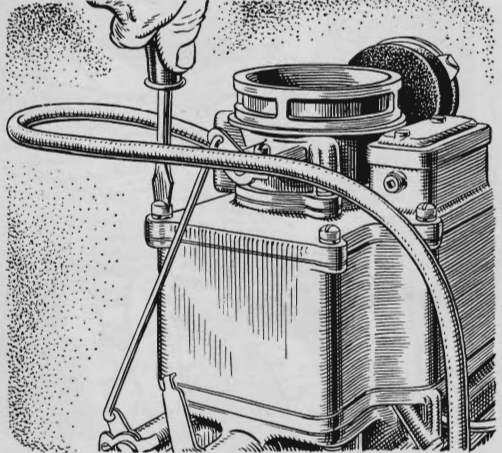

Stalling or rough idling may be caused by air sucked in around the gasket between air-horn assembly and float bowl or carburetor body. Tighten hold-down screws periodically, and also check on the nuts that hold the carburetor to manifold.

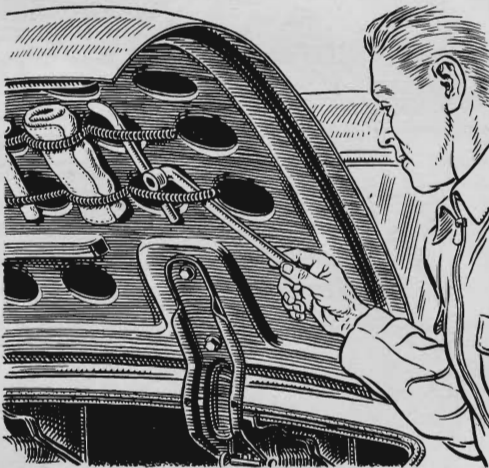

For a neater trunk, stretch a pair of door springs across the inside of the lid, hooking the ends into existing holes. You can then store miscellaneous equipment there—small tools wrapped in cleaning cloths, work gloves and so on. Wire the springs to the lid at intervals to provide compartments for specific items.

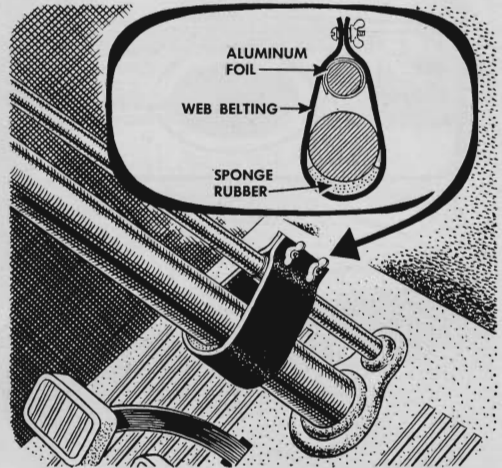

To stop vibration noise in a shift rod paralleling the steering column, try this trick. Belting from surplus army equipment is ideal, for it contains reinforced eyes every few inches. Run small bolts through these. Aluminum foil around the rod acts as a lubricant. The rubber allows a certain amount of give.