






Hints from the Model Garage

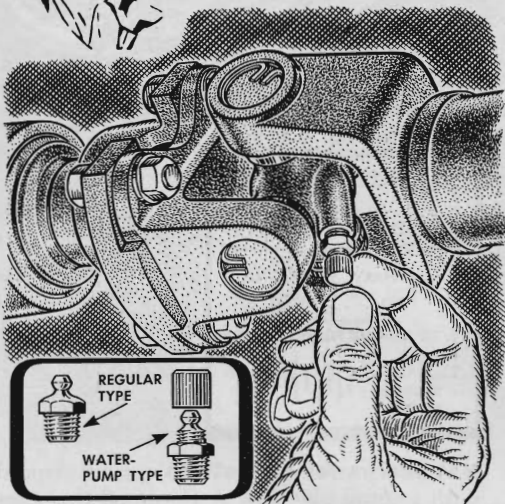


Grease fittings with caps are a worthwhile investment in under-car locations. Unless ordinary fittings are carefully wiped during a lube job, the gun may force specks of dirt inside, plugging the fittings or damaging the parts being greased.

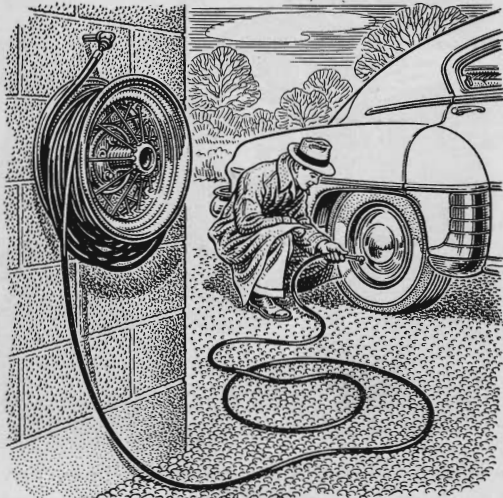

An air-hose hanger for the service station can be quickly made from an old car wheel. Bolt it to the side of the building at waist height. This will keep the hose off the ground and make it easy to unwrap and replace after use.

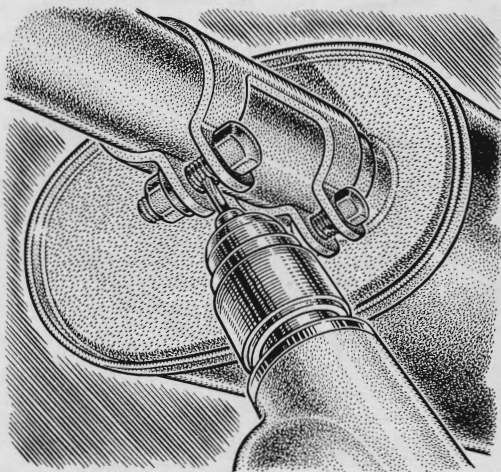

If you can't loosen a bolt holding a muffler or hose clamp and there is no space to use a hacksaw or chisel, try this: Drill a small hole through the side of the bolt and follow it with a bigger drill. Then twist the bolt off.

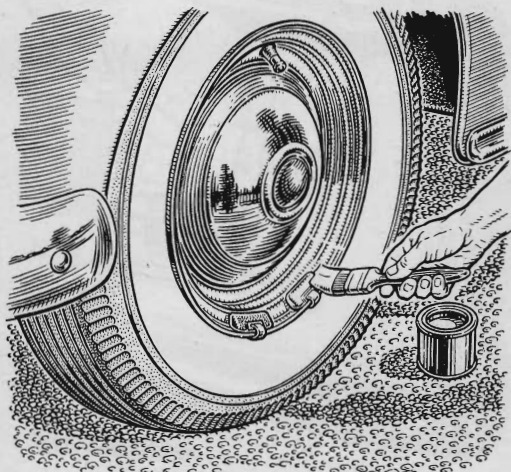

After your wheels are balanced, they'll look better if you paint the balancing weights the same color as the wheels. A small can of matching touch-up paint will do the job quickly. At the same time, touch up any marks or scratches on the wheels, too.