






# Hints FROM THE MODEL GARAGE

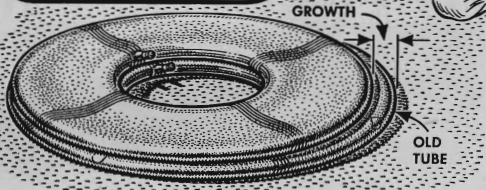

**A small dent in the top** of a car can often be pushed out by pressing a blunt ice pick and knitting needle through the headlining and tapping up. Then scratch the material around the hole in the headlining and fuzz it up to remove traces of the hole.

**Because rubber grows** in use, putting an old tube in a new tire may not be a good idea. New tubes usually are smaller in cross section than the same size casing to allow the tube to stretch into place inside the tire. An old tube may become pinched.

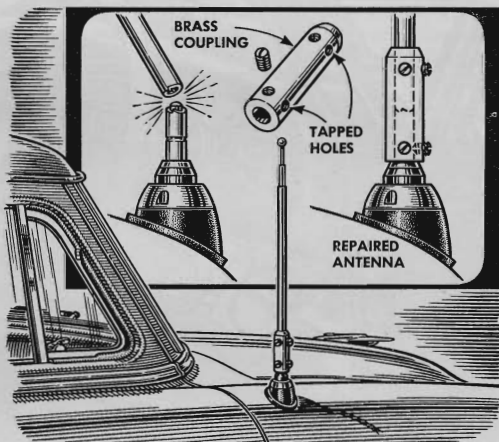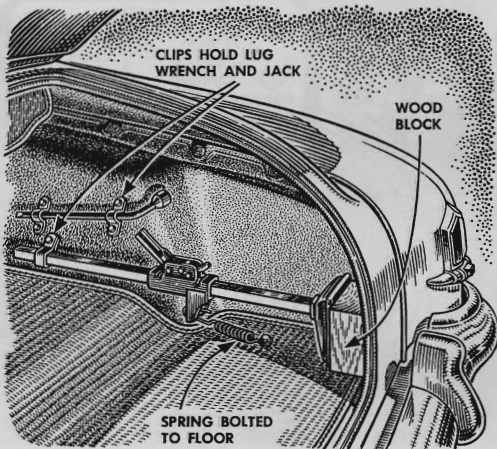

**Rattle-free jack storage** is easily provided. Attach two pipe straps to the trunk side with self-tapping screws, canting one in relation to the other so you'll have to press the wrench in place. Mount a spring to keep the jack butted against a wood block, with the shaft resting in a metal clip. Use the block as a wheel chock.

**If an antenna is broken** by mischievous children or overhanging tree limbs, it can sometimes be put back into service by making the repair illustrated here. The coupling might be made from a piece of brass, which makes a good electrical connection. Setscrews turned into the tapped holes will keep the two aerial sections together.