





Improvise a coat-hanger bracket by closing a rear window tightly on a rubber fruit-jar ring. The ring will support several garments on hangers and will leave no marks or scratches on the window. A ring cut from an inner tube will serve as well.



Calibrate an old coffee pot for use as an oil measure by filling it a pint at a time and punch-marking the side to the level reached as each additional pint is poured into it. Make the punch marks crisp enough to be clearly visible from the inside.

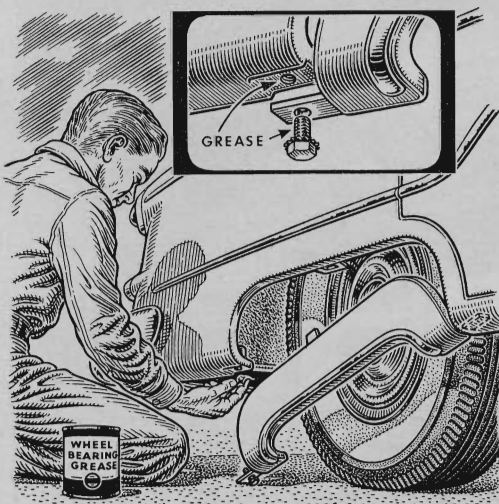

Make fender skirts easy to remove by coating the lock bolts with heavy wheel-bearing grease to keep them from rusting. Skirts are bolted on many late-model cars and it is almost impossible to remove a rusted-tight nut without twisting or otherwise damaging the fender.

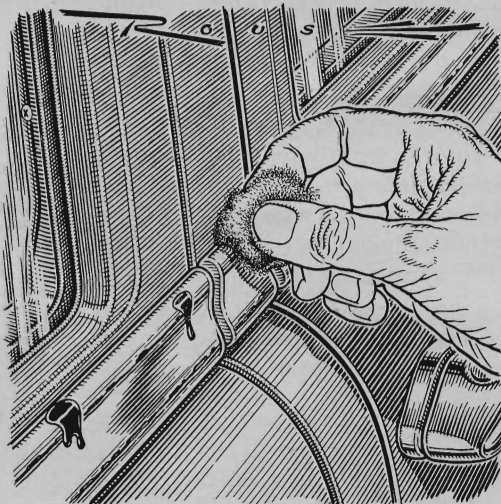

Clean paint off chrome trim or rubber moldings with steel wool, after doing a touch-up or spray job on the body. Wind the wool around a stick if the area is small or hard to reach. This way, you won't put scratches on the trim as you might with a knife or scraper.