

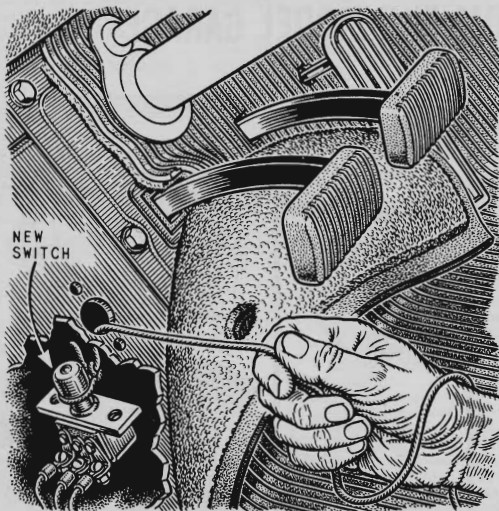



***MORE* Hints from the Model Garage**

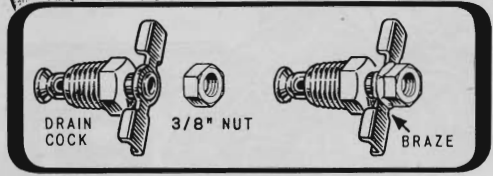

Tie a string to an old headlight dimmer switch before removing it to install a new one. This way you can pull the old one down by its wires and connect the wires to the new one. Tie the string on the new one and pull it up from inside the car.

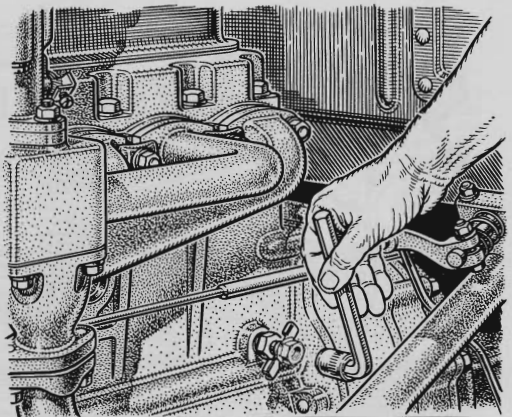

Braze a 3/8" nut on the T handle of your car's drain cocks to make them easier to turn. They are usually hard to reach, too, but a 12-point socket wrench will slip over the nut easily and open the drain in the tightest spaces. Water runs through the nut.

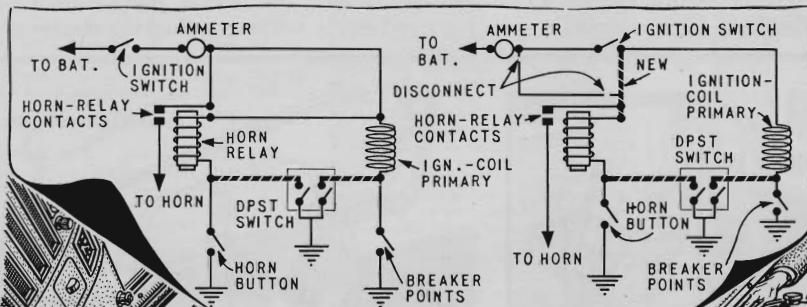

CLOSE ALARM SWITCH AND HORN WILL BLOW IF THIEF TRIES TO START CAR

Throw a toggle switch concealed under the dash when you leave your car, and a thief's attempts to start it with a trick key or by jumping a wire to the coil will be loudly announced by a steady blast of the horn. Even if he cuts the horn wire to work in silence, he won't start the engine; the breaker points are grounded and won't spark.

The diagram at left above shows how to wire a double-pole, single-throw toggle

switch on cars having the horn relay wired through the ignition switch. Heavy lines indicate the new wires. On other cars, the toggle wiring is the same, but the horn relay is disconnected from the ammeter or starter post and rewired to the ignition switch as in the diagram on the right. In either case, the horn cannot be sounded with the horn button unless the ignition switch is turned on.