




MORE Hints from the Model Garage

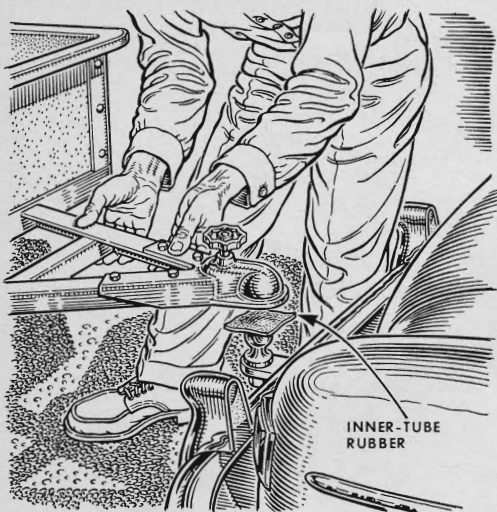

Rubber padding in the socket joint of the hitch will give you a nonrattling coupling that won't click and jerk when you pull a light trailer. Just lay a square of old inner-tube rubber on the ball before dropping the hitch on it.

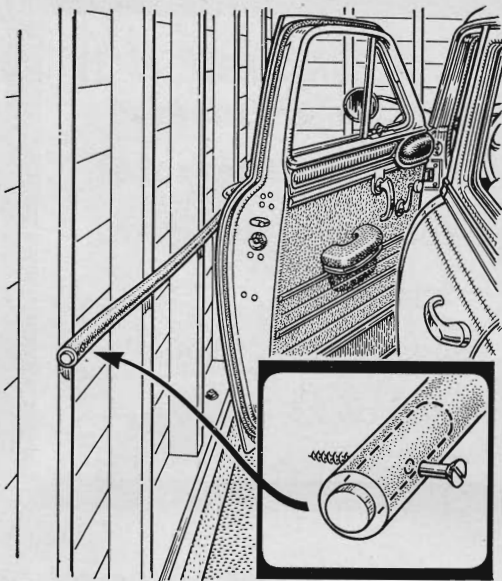

Discarded garden hose used as a bumper on your garage wall protects the car door when you open it to get in or out. Drive a short dowel in each end and drill for a mounting nail or screw. Use a concrete nail or expansion bolt in a masonry wall.

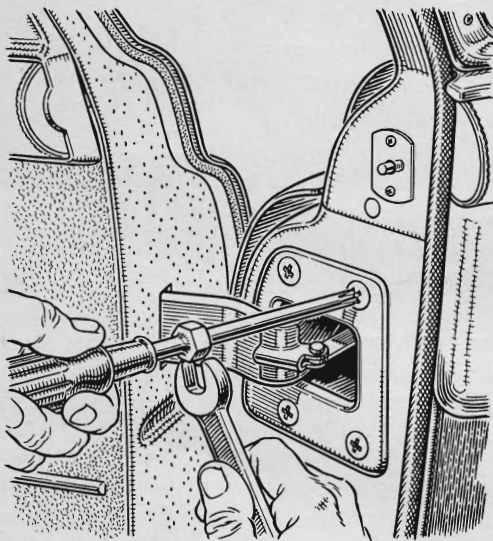

Turning a screwdriver while tightening or removing a door hinge can be made easier if you braze a nut on the shank near the handle. Then put pressure on the end of the screwdriver and do the turning with a small open-end wrench.



Model-airplane dope or fingernail polish will cut down annoying glare from dash lights. Simply dip the bulbs in the red dope and let dry. Then, checking as you work, start at bottom and gradually scrape off coating until light level is just right.