


Discarded seat covers can be used to hide soiled or torn upholstery on car doors. Turn the covers with the bottom side out. Cut pieces with an inch to spare on all sides. Turn the edges under. Remove the door panel and staple the cover to it.



To keep on a driveway hidden by snow, line it with cement markers. Grease the inside of a glass jar, pour in cement and insert the bent end of a 3' piece of heavy wire. Remove the jar when the cement has set. Next fall, raise the markers a foot or so.



Pouring gasoline into the tank inlet of a modern car without splashing the finish is always difficult, even with a funnel. A piece of radiator hose clamped to the screw-top opening of a gasoline can will serve as a flexible pouring spout.

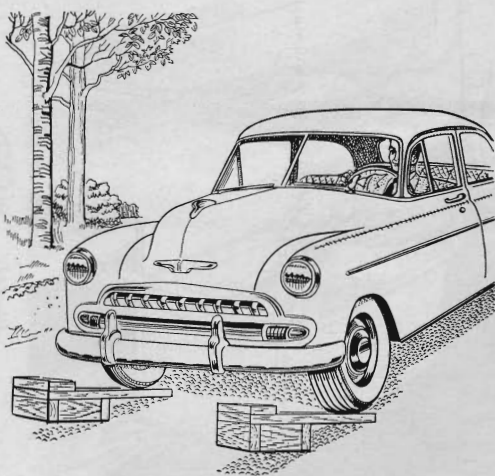

Ramps for undercar work can be made by cutting eight 11½" lengths of two-by-six stock. Nail these on edge to make box forms. Nail each box under the end of a 36" length of two-by-twelve plank. Put the ends under the wheels and drive up on the ramps.