




More Hints from the Model Garage

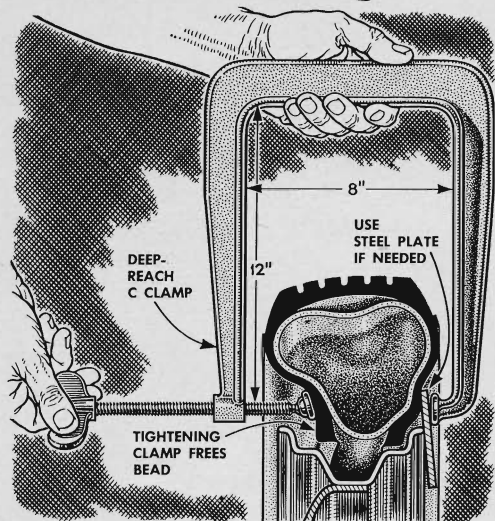


Bead stuck when you start to demount a tire? Here's one way to remove it—if you have or can borrow a deep-throated C clamp of about the dimensions shown. With clamp in place, turn screw to free one side. If the second side remains stuck, use a steel plate as in the drawing.

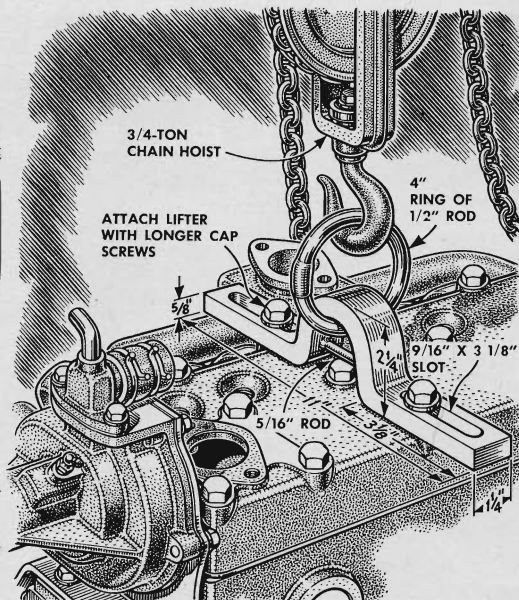

A universal engine lifter is what its developer calls this useful shop accessory. Slots make it possible to attach the lifter to a variety of engines: Merely replace two cap screws with longer screws. The lifter was bent to the desired shape from a bar of 5/8"-by-1 1/4" steel stock.

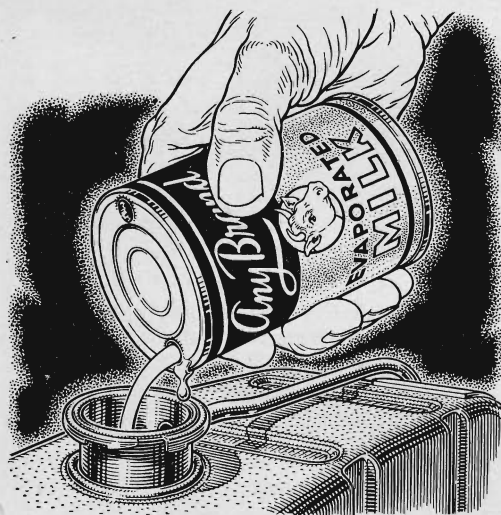

Evaporated milk is part of the stock in trade of one garage man. Poured into a radiator, it often stops small leaks. If the leak continues, the mechanic concludes that a radiator repair job is needed.

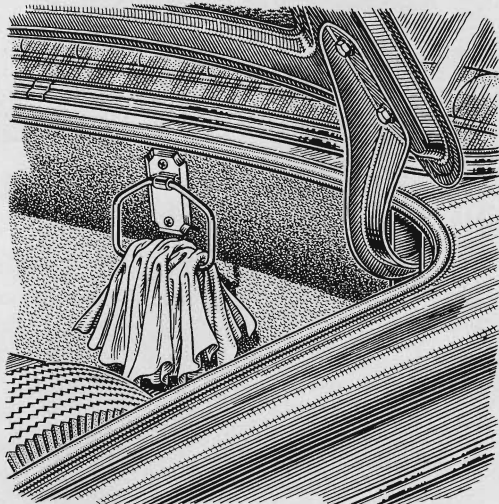

Do you use a polishing cloth on frequent occasions between washings to keep your car spotless? Drape it over a chrome towel ring mounted (with sheet-metal screws) in the luggage compartment.