





Hints from the Model Garage




A cotter-pin hook like this will keep a whisk broom handy for sweeping out the car. Bend up one arm of the pin as shown. Then slip it over the side panel or through a hole punched in the panel.

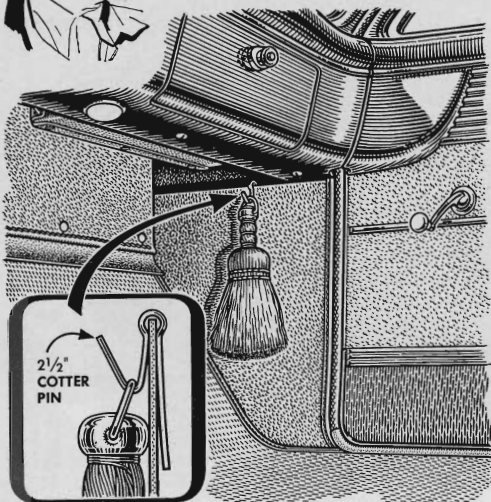


An unfolded map pinned neatly to the head-lining above the front seat is easily referred to during a trip. The driver should consult it of course only after stopping, for instance, at a stop light.

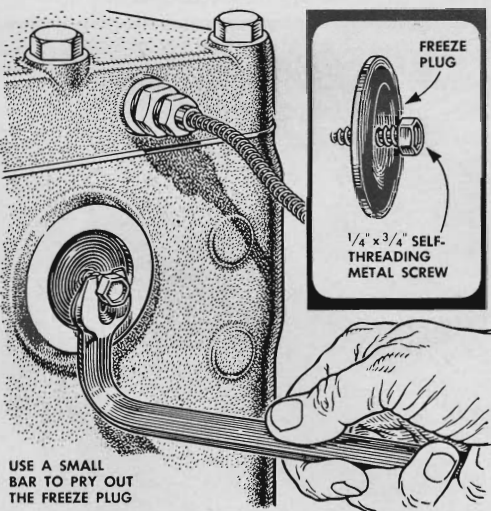

USE A SMALL BAR TO PRY OUT THE FREEZE PLUG

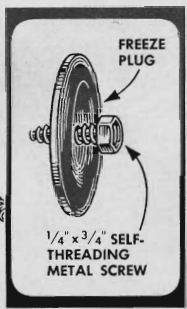

FREEZE PLUG
 $\frac{1}{4}$ " x $\frac{3}{4}$ " SELF-THREADING METAL SCREW

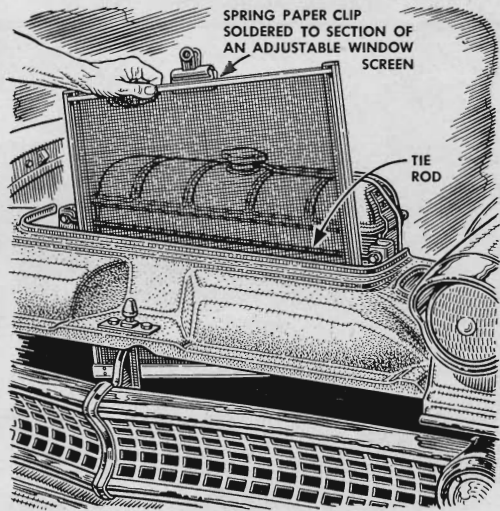

SPRING PAPER CLIP SOLDERED TO SECTION OF AN ADJUSTABLE WINDOW SCREEN

TIE ROD

If a freeze plug leaks, tapping with a hammer will usually seal it. When this doesn't work, one mechanic drills a small hole in the center of the plug, turns in a metal screw about four turns, pries out the plug and drives in a new one.

During the bug season one motorist keeps insects from plugging his radiator by slipping a section of an adjustable window screen into the opening behind the grille. A clip soldered to the screen rim holds it to the radiator tie rod.