

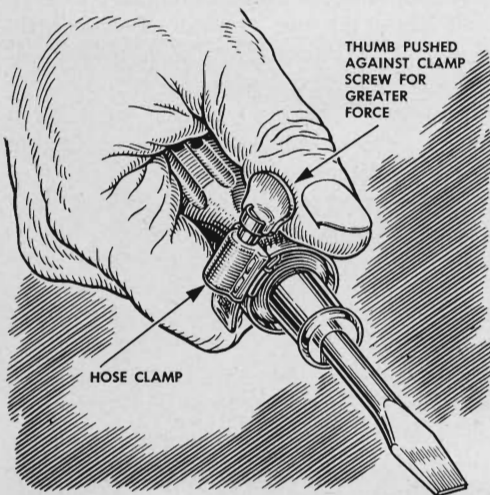



Flush dirt from the underside of a car without getting yourself wet by clamping the hose to a dolly made from a 6' length of pipe and half a roller skate. Bolt the skate to the pipe and bend up a handle. To avoid a geyser, turn on the water *after* pushing the dolly under the car.

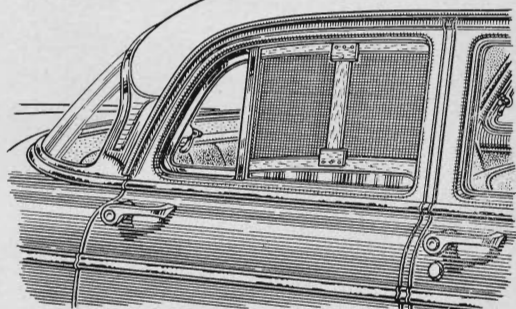

Get a better grip on the handle of a screwdriver by tightening a worm-gear hose clamp around the handle near the shank of the blade. Grasp the tool so that your thumb bears against the clamp screw in the direction you're turning.

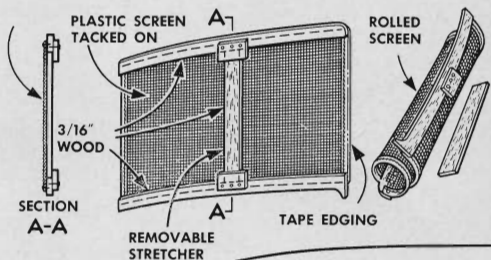

These car screens roll up for compact storage when not in use, yet they can be installed in minutes. Tack plastic screen to an upper and lower spreader shaped to fit the contour of the window. Insert a strip of wood to stretch the screen and secure it by raising the window against it.

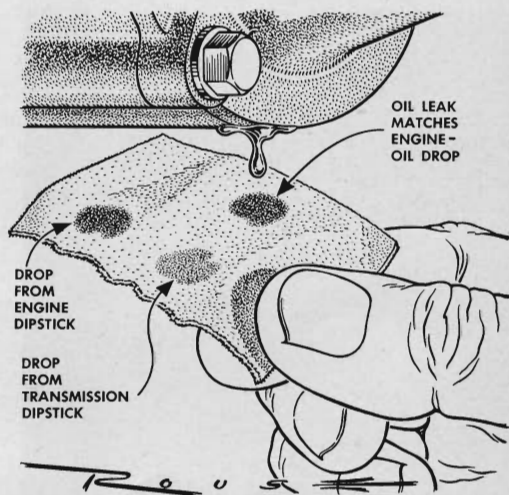

To locate an oil leak, pull the dipsticks from engine and automatic transmission and let a drop of oil from each fall on a white blotter. Then hold the blotter under the car to catch a drop of leaking oil. Compare the colors.