
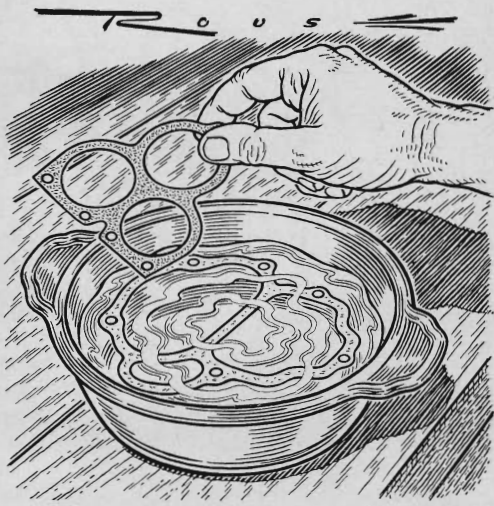


A mark painted on your bumper jack will tell you quickly just how high to raise the car to clear both the flat and the inflated spare. On some cars, two height marks may be needed, one for jacking the front end and one for the rear.

Extra storage space for tools, oil, flashlight and spare parts can be obtained by bolting a steel tool box behind the grille on each side of the radiator. Be sure to locate the boxes so they can be reached easily and do not obstruct the radiator.

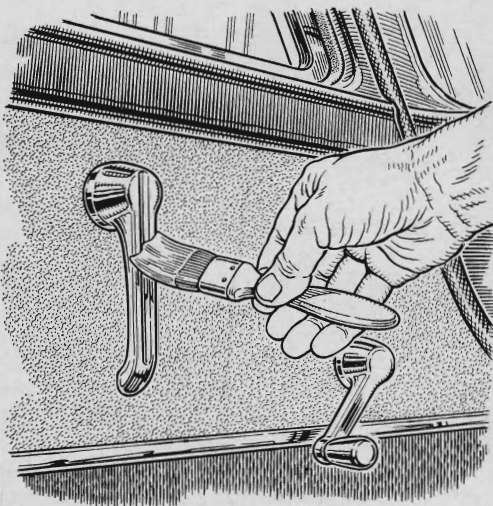

If static electricity gives you a jolt each time you touch door or window handles, apply a coat of thinned white shellac over the metal. The shellac will act as insulation and, incidentally, will protect the metal handles and keep them bright.

When re-using gaskets after minor carburetor repairs, soak them in water or kerosene while you work on the assembly. The fluid causes the gaskets to expand and their fibers to fluff up to full thickness. Treat new gaskets the same way.