


EIGHT TIMESAVERS

1 ANNOYING CAR STATIC is grounded by running a bare wire from the garage ceiling through an eyebolt in the floor to a pipe driven four feet into the ground and making contact with the car bumper. Connect a length of inner-tube rubber and a small plate of sheet steel or tin high in the wire for stretch and visibility. —E.G.M.

2 A CAR-WASHING AID, especially for cars built without running boards, is provided by stringing ropes across the garage ceiling. Standing on a box, you can hold on to a rope with one free hand while cleaning the top. —W.C.W.

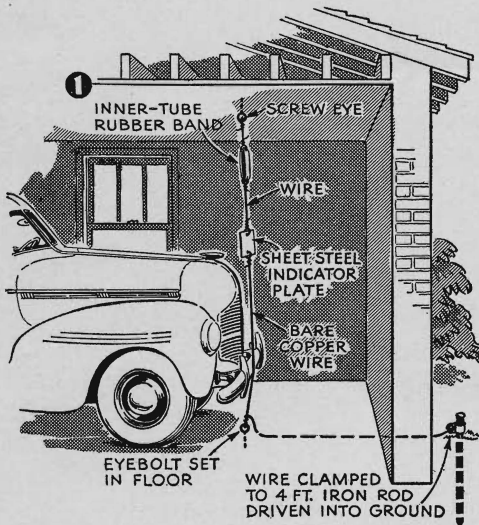

3 MANY USES ARE FOUND for a shelf that slides in or out beneath the dashboard. Made of three-ply wood sawed to fit the space available, it runs in channels of sheet metal which are bolted to the bottom of the dashboard. Drawn out, it is handy for lunching, writing, or other purposes. A small handle should be attached near the front of the underside. —J.S.

4 YOUR TIRE JACK can be slid under the axle more easily by putting it on a block of wood. Drill a hole at an angle to fit the jack handle, and use it to push the block under the car. —C.W.

