




More Hints from the Model Garage

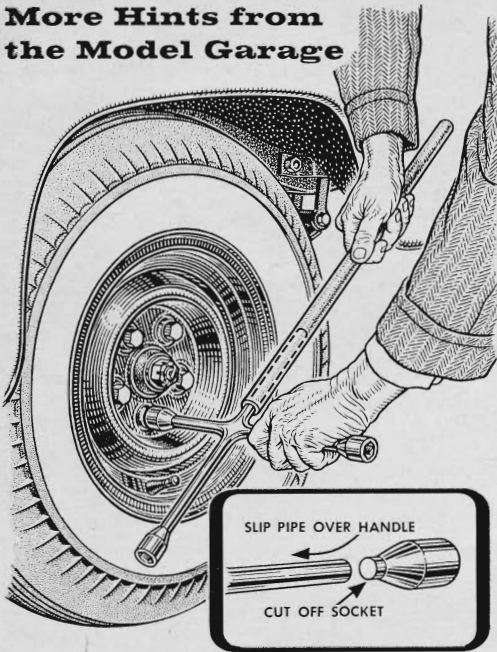

Loosening wheel lugs is easy if you have leverage. Cut off the lug-wrench socket next to the one that fits your car. Then slip a two-foot pipe extension over the shaft. Women will appreciate this if they ever have to change a tire.

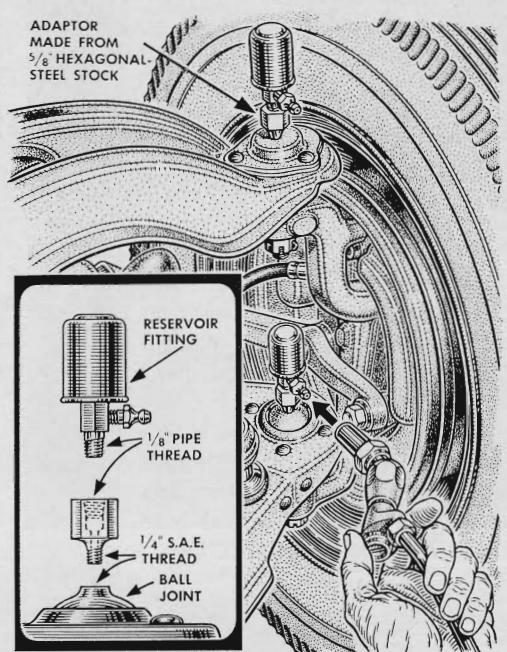

Ball joints won't run dry when greased continuously by these reservoir fittings. Grease pumped into the spring-loaded fittings is fed into the bearings as they require it. Your car will always run as if it just came off the lube rack.

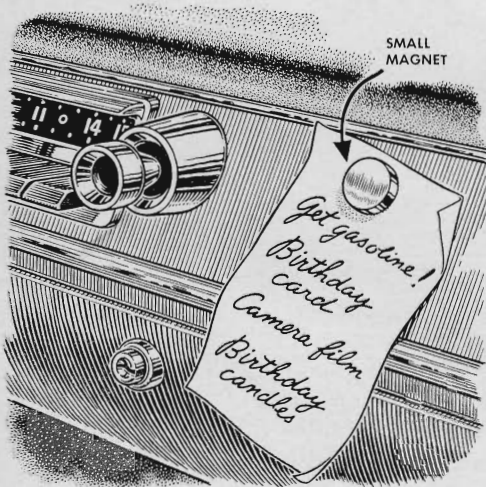

"Tack" notes to the dash panel with a small magnet—the type sold in stationery stores for kitchen use. They're strong enough to hold without sliding. You can use them to hold addresses, maps, or reminders of errands to be done.



Clean the sump, too, when changing paper air-cleaner elements. Dirt, trapped in the sump after being stopped by the filter, may find its way into the carburetor. Best practice is to remove the whole assembly before taking out the filter.