




More Hints from the Model Garage

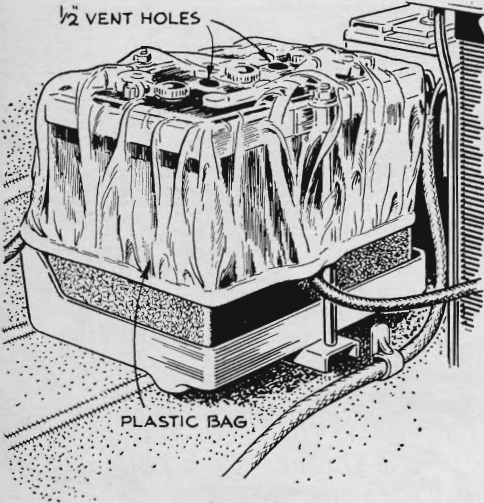


Protect the top of your battery from dirt and short-circuiting moisture, and cut down excessive evaporation of the electrolyte this way: Cover it with a plastic freezer bag. Cut two holes in the bag to vent off charging gases.

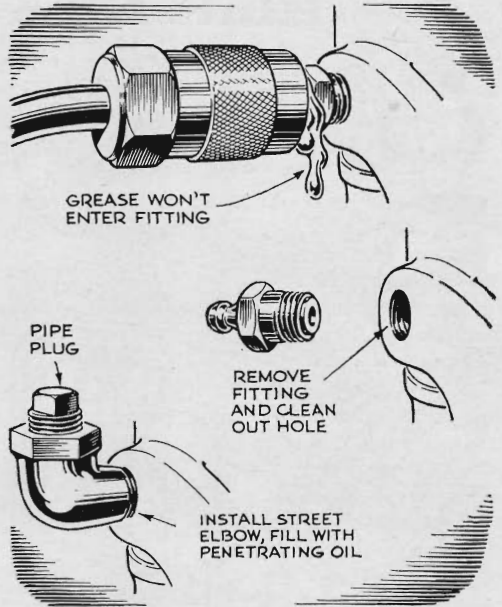

To clear a clogged grease channel, replace the fitting with a street elbow, fill the elbow with penetrating oil, and drive for a week. Put back the fitting and try your grease gun. Fresh grease should now force the old grease out.

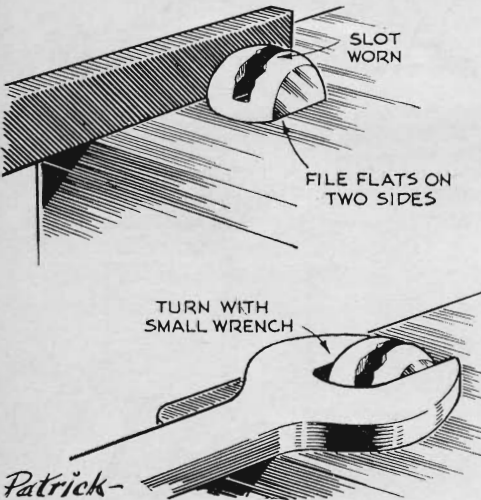

A stubborn roundhead screw that resists removal because it's frozen or its slot is chewed beyond use can be unstuck by filing flats on opposite sides of the head. Then you can use a wrench on the flats to turn the screw with ease.

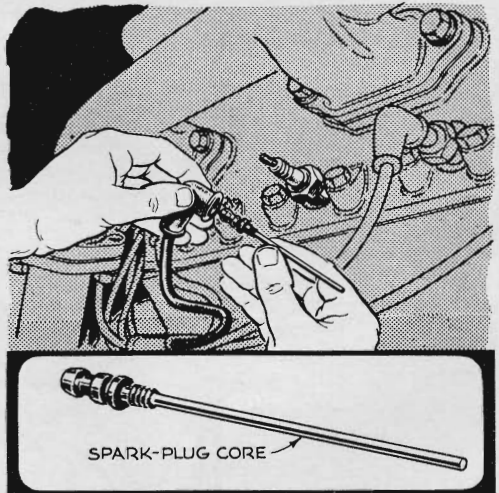

A spark tester, handy to use when spark terminals are sheathed in rubber, is easy to make this way: Break an old spark plug apart and save the core. The cap will snap easily into the wire terminal, leaving the core exposed for testing.