






Hints from the Model Garage

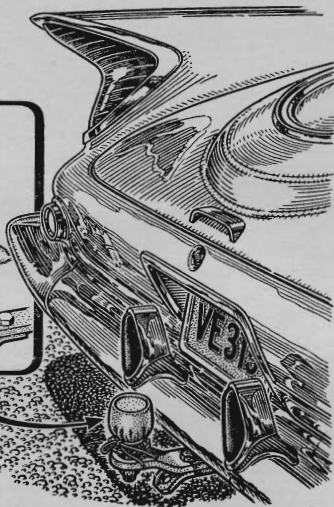


A trailer ball hitch won't rust while not in use if you place a few drops of heavy oil on it and cover it with a rag. Fold the rag to about four inches square. A wax-paper cup tied over the rag with strong cord gives extra protection.

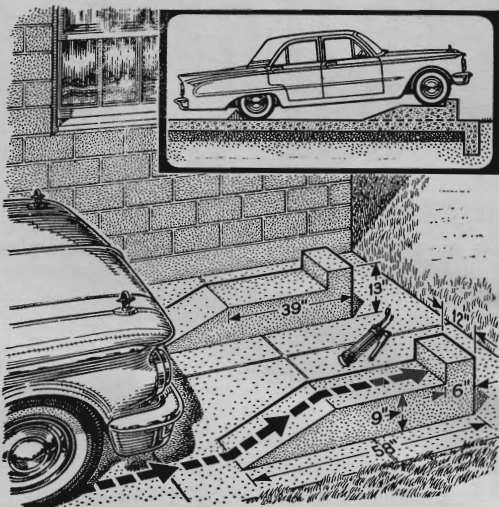

Two reinforced-concrete ramps built at any convenient spot will allow you to raise the front or rear of your car for home servicing and repairs. The car's track will determine ramp spacing. Use wheel chocks at opposite end for safety.

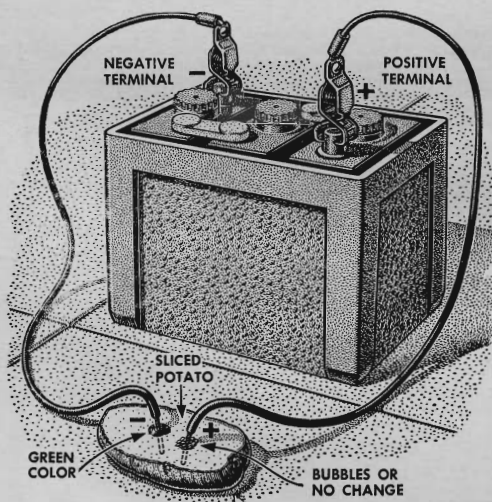

Which battery terminal is which? When corrosion obscures markings, half a potato can come to the rescue. Run leads from terminals into the potato, about an inch apart. Green color identifies negative lead. Positive lead may show bubbles.

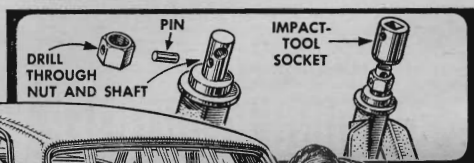

Fast jacking with a power impact tool. Remove handle from a tripod jack and replace it with the largest nut the impact tool will accept. Drill through nut and jackshaft, secure with pin, file pin flush. Engage the impact tool and let 'er go.