




More Hints from the Model Garage

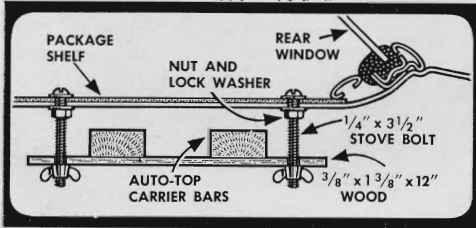


A car-top carrier can be neatly stored in the unused space beneath the rear package shelf in a sedan. Lock four long bolts in the shelf so they protrude into the trunk. Use wing nuts and wood strips to clamp the carrier between the bolts.

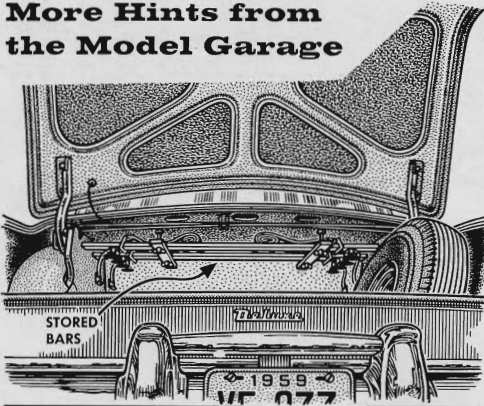

Block and tackle won't pull your car out of a soft back road or a sandy seashore if there's no place to secure the ropes. An effective "deadman" can be made by burying the spare wheel—the deeper the better—and using it as an anchor.

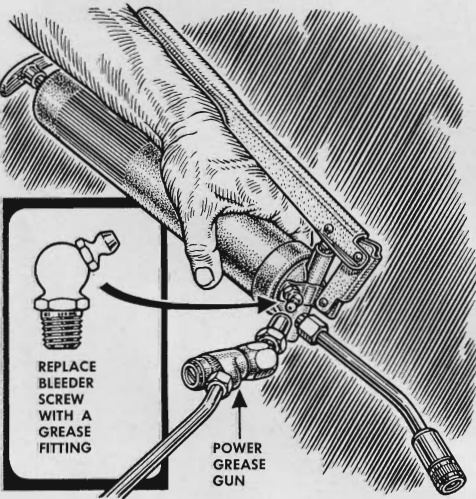

To eliminate the mess of spooning grease into a grease gun, remove the bleeder screw and install an ordinary grease fitting. You can then have the gun filled at any service station without opening it. Cost per filling is about 50¢.

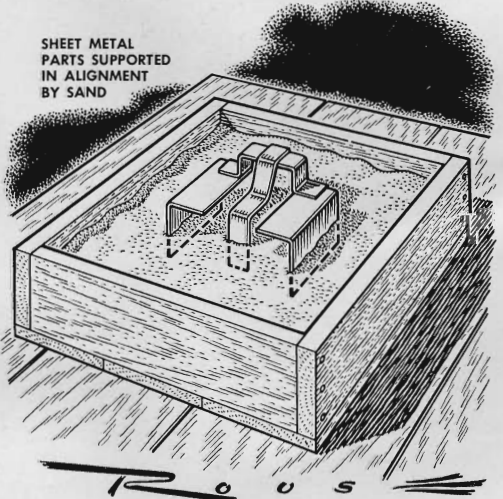

A box of sand kept near the shop welding machine is useful for holding irregularly shaped parts together while they are tacked or brazed. Pressed in deep, the parts are firmly held, and the sand doesn't steal heat from the metal.