



FOR CAR OWNERS

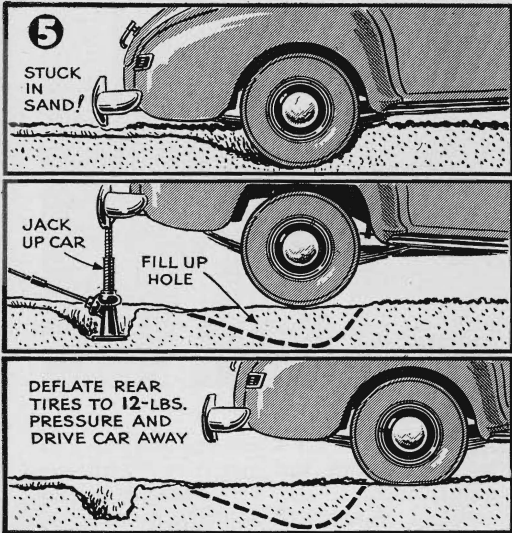

5 A CAR WHEEL STUCK IN SAND is freed easily with the technique illustrated at the left. Dig a small hole for the bumper jack and raise the wheel as far as possible. Then shovel or kick as much sand under the wheel as you can, packing it in. Deflate the tire to around 12 or 14 pounds. Remove the jack and you will be able to drive the car away under its own power.—J.D.

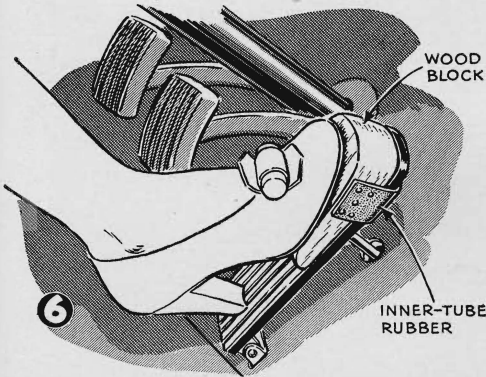

6 WITH A TOE REST slipped over the accelerator-pedal tip, women wearing high-heel shoes will find car driving much easier. Cut from a block of wood to a comfortable size, and held in place by a strip of rubber or leather, the toe rest raises the instep and relieves the ankle of strain.—A.H.W.

7 MANY MOTORISTS PREFER not to use their rear-view mirrors at night. An ingenious, glareless substitute is afforded by small colored reflector buttons cemented to the center strip of a divided windshield. Car lights from far behind strike all the buttons; close behind, they strike only the top ones, thus indicating their distance to the driver. Remove the bolts from five-and-dime-store buttons, apply mending cement, let it dry, then reapply cement and attach the buttons, for a firm hold.—R.P.

8 A HANDY TOOL for digging bits of glass, sharp stones, and the like from tire treads is made by grinding away a portion of the blade of a pocket screwdriver, as illustrated below.—W.E.B.

Drawings by
STEWART ROUSE

