



# USEFUL AUTO HINTS

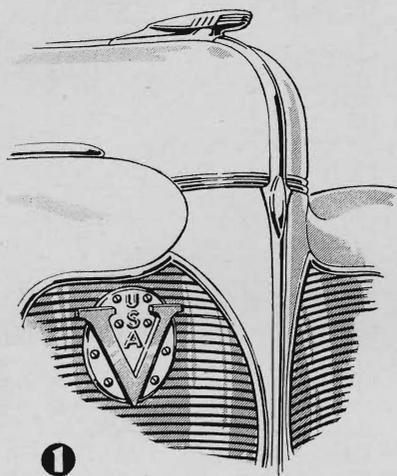


1

**1 BREAKS IN GRILLS** can be concealed by mounting radiator emblems over them. To do this, drill suitably spaced holes in a piece of flat stock such as heavy sheet metal and place this behind the bars of the grill, running the mounting screws through it.—J. B.

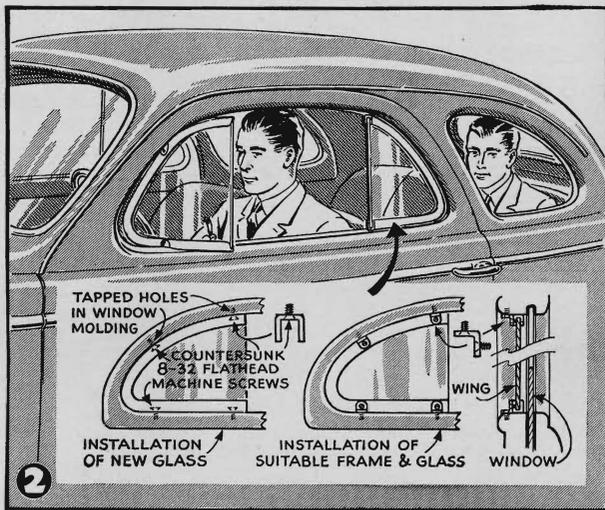


2

**2 AUXILIARY WIND WING.** Drafts coming from the wide front door of a club coupe or two-door sedan can be eliminated by the addition of a wind wing. Cut a template from a piece of stout cardboard and buy a matching wind wing at a wrecking yard. If you cannot procure a wing of the correct shape, obtain a windshield-wing frame and bend it to conform to the inside molding on the car door; then have a piece of safety glass cut to fit the frame. When fastening the frame to the door, leave about  $\frac{1}{4}$ " clearance so the wing will not interfere with the operation of the door glass.—A. S. L.

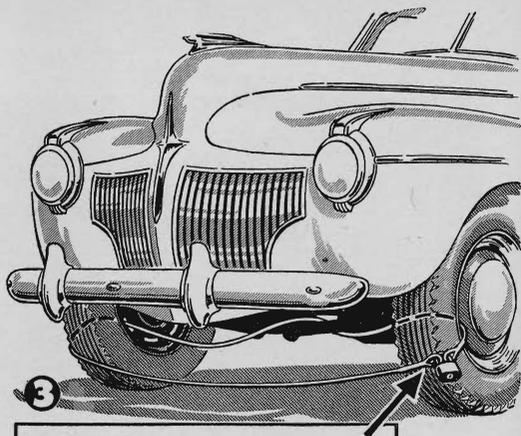


3

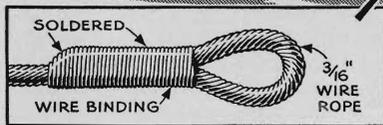

DRAWINGS BY STEWART ROUSE

**3 TIRE THIEVERY** can be prevented by running a  $\frac{3}{16}$ " wire rope through the wheels and the knee-action assembly, or else over the axle. Insert a lock through loops on the ends, which are secured by a soldered wire binding as shown.—M. S.

**4 A CRACKED CYLINDER HEAD** can sometimes be repaired by placing a steel plate over the crack, as shown. Two rows of holes are drilled alongside the crack, and one hole at each end to prevent further cracking. All holes are tapped, and a gasket placed between the head and the plate.—J. B.

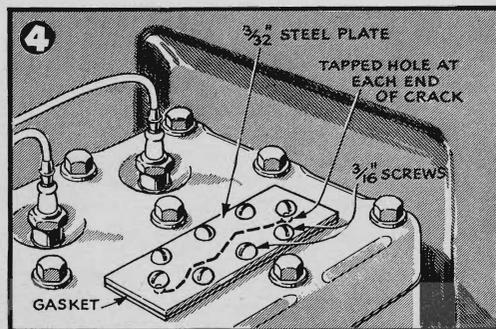

4