






Hints from the Model Garage

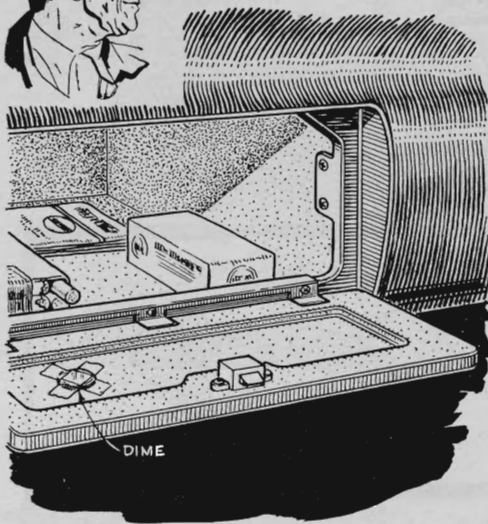


A dime taped to the glove-compartment lid could be the most important piece of emergency equipment you have. A phone call from a roadside booth can quickly summon an ambulance for an accident victim or a mechanic if your car should break down.

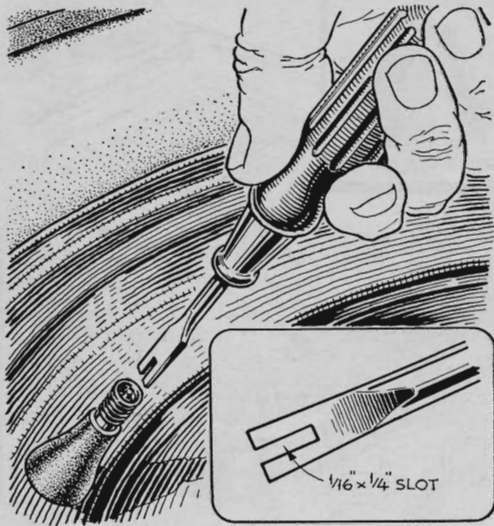

Removing the valve stem from a tire is an easy job with this homemade valve tool. Cut a $\frac{1}{16}$ " slot in the tip of a thin-bladed screwdriver with a hacksaw and file. You may have to grind down the edges of the blade so it will fit inside the valve.

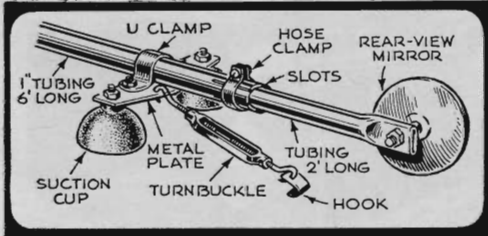

Extend these mirrors when towing a trailer and push them in when the trailer is unhitched. Accessory mirrors are attached to 2' aluminum tubes that telescope into a 6'-long, 1"-diameter tube with slotted ends. Clamps hold the extensions tight.

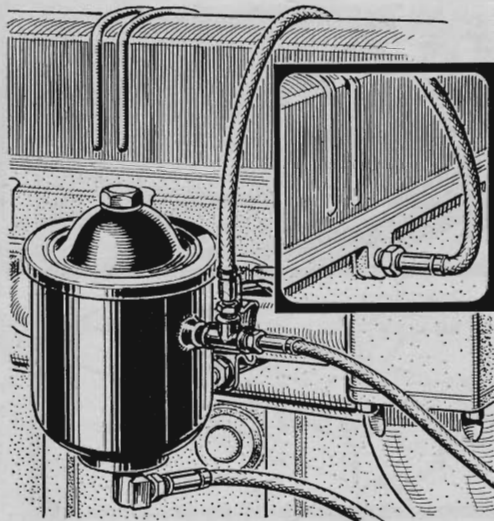

Fouled rocker-arm oil lines are common on certain sixes. Easy fix: Install a tee fitting on the oil-filter outlet. Then run a flex line from the tee to the clean-out hole on the right side of the block to feed oil directly from the filter to the rocker arms.