




Hints from the Model Garage




An automobile handy light with its 12-foot plug-in cord is a fine way to save your flashlight batteries. However, the cord always presents a storage problem. Here's a solution: Instead of trying to keep it wound on the cardboard it was purchased on, try

storing it on one of those big spools of the kind that's used for surgical adhesive tape. Bend one side of the spool into a lip so that the lamp and plug can remain outside. You will find that the bothersome cord cannot loosen or become unwound.

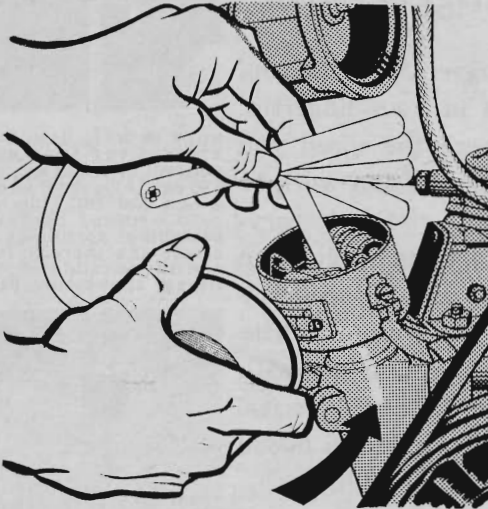

When adjusting point gap, it's easier to position the rubbing block on the cam lobe by turning the distributor. Mark the distributor base. Loosen locking bolt, rotate distributor until gap is maximum. Adjust points, return distributor to mark, and lock.

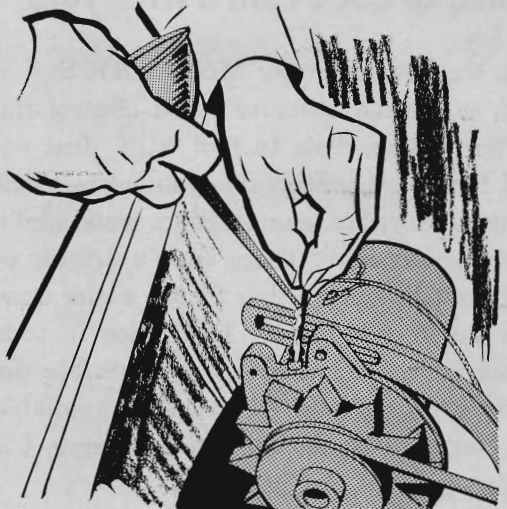

To keep from over-oiling a generator with the customary squirt can, introduce the point of a nail into the spring-covered oil tubes. Let the spring cap hold the nail in place. Then let one or more drops of oil run down the side of the nail.