





Hints from the Model Garage

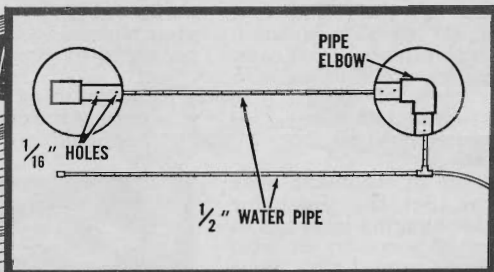


An undercarriage spray washer prevents corrosion from road salt used in icy weather. Make it in a U shape, using two long pieces and one short piece of $\frac{1}{2}$ " water pipe, joined with an elbow at one corner and a garden-hose connector at the other.

Plug the ends of the U, and drill $\frac{1}{16}$ " holes, angled outward about 15 degrees, in the three pipe sections. Connect the hose, drive the car over the sprayer, and turn on the water. After a few minutes move the car several inches and give it another bath.

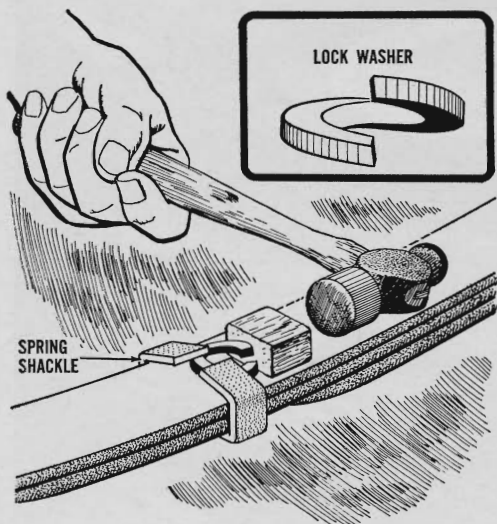

Cure rattles in leaf-spring shackles with one or two lock washers. Spread the washers farther out and, using a small block of wood, drive them between the shackle and the top spring leaf. This puts pressure on the shackle and keeps it from rattling.

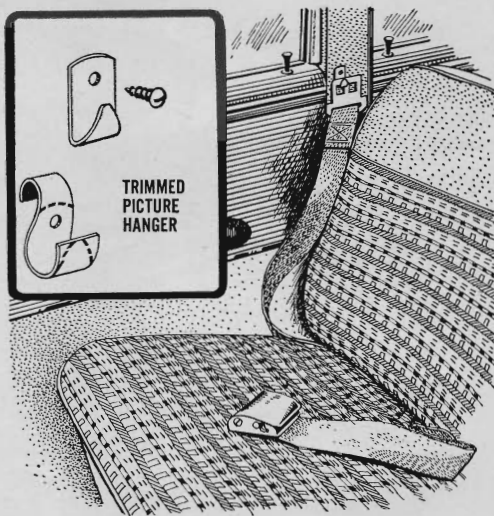

Hook the outside seat belts to the door post and they'll stay clean and not get caught in the doors. Make hooks from cornice picture hangers trimmed as shown or from $\frac{1}{32}$ " sheet metal. Drill the door posts and mount hooks with self-tapping screws.